

SAIR CLEANER

AIR CLEANER - air free of viruses and bacteria

Our product sterilizes the air thanks to the action of UV-C tubes with properties against bacteria, fungi and viruses (including Covid-19*); this technology, with results demonstrated by numerous studies, is safe and has an effectiveness of 99.9% against microorganisms.

The low pressure tube technology is more effective than many of the imported products that use UV-C LED radiation, as the low pressure tube radiation is at the wavelength with maximum germicidal effect, exactly 253.7nm.

The product leaks no light so it can work continuously in the presence of people unlike direct radiation products that should only be used in the absence of living beings, with timer and presence sensor.

Our product is UV-C Free and Ozone Free.

Its operation provides for a forced ventilation system that absorbs contaminated air; once inside the disinfection chamber the air comes into contact with maximum germicidal action UV-C radiation before being returned to the environment. We use top brand tubes, Osram or Philips.

The product is CE marked and tested in European laboratories.

*Studies on effectiveness were conducted on other viruses in the RNA coronavirus family such as Sars or Mers therefore this technology is also effective against Covid-19.

INSTALLATION LOCATIONS


Our product can be installed in public buildings such as schools, offices, cinemas, gyms, as well as in shops, restaurants, bars, and hotel rooms.

AIR CLEANER can also be installed in private homes.

We have three powers for environments of 20m², 40m² and 80m².

We can also provide mobile support.

DISINFECTION MODE

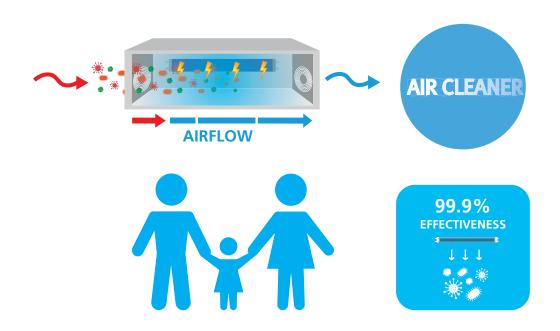

AIR CLEANER









	AIR CLEANER 15	AIR CLEANER 30	AIR CLEANER 60
CODE	A38931B	A38932B	A38934B
USE	Homes, administrative premises, healthcare, education, commerce, hotels		
ADVANTAGES	Air sterilization in the presence of humans, silent operation		
FOR ROOMS UP TO	20 m ²	40 m ²	80 m ²
MATERIAL	Aluminum profile		
AIR FLOW / TIME	20m³ / h	30m³ / h	50m³ / h
SURFACE TREATMENT	EPOXY		
AIRFLOW	Continuous		
SUPPLY VOLTAGE	230 V / 50 Hz		
T8-T5 FLUOR UV-C	T8 - 1 x 15 W	T8 - 2 x 15 W	T5 - 4 x 15 W
USEFUL LIFE T8-T5 / UV-C	9000 hours		
DEGREE OF PROTECTION	IP20		
DIMENSIONS (L X W X H)	749 x 220 x 91 mm		
WEIGHT	5 Kg	5.2 Kg	5.4 Kg
MOUNTING	Wall, ceiling or mobile on floor trolley		
WARRANTY	24 months		
OPTIONAL ACCESSORIES	Mobile floor support		
BRAND T8 -T5 FLUOR	Exclusive use OSRAM / PHILIPS		

accessory MOBILE SUPPORT



	accessory IVIODILL OOF FORTH
CODE	XSOP3893B
MATERIAL	Steel profile
SURFACE TREATMENT	EPOXY
DIMENSIONS (L X W X H)	510 x 500 x 1004 mm
WEIGHT	5.4 kg
MOUNTING	Soil
WARRANTY	24 months



CAUTION! DISCONNECT THE DEVICE FROM THE POWER SUPPLY BEFORE OPENING THE COVER! DANGER OF INTERFERENCE WITH ULTRAVIOLET RADIATION DURING INCORRECT MAINTENANCE! THE MAINTENANCE OF THE DEVICE CAN ONLY BE PERFORMED BY A QUALIFIED PERSON!